

Fully powered Logiflex Mini – light, flexible and safe!

Logiflex Mini is a light and manoeuvrable fully powered stacker – your best choice for the light handling in minor storage and shopping areas.

The design puts focus on the safety and ergonomic working conditions of the user. Logiflex Mini can be adjusted to the individual user, and the ergonomic correct handle ensures the user a relaxed hold. The low overall height gives optimum view conditions.

No damage to surroundings, pallets and goods – Logiflex has an elegant design with rounded corners.


High quality is ensured through an extended test programme and in cooperation with experts in Health and Safety.



Technical Specifications

Logiflex Mini gives the user


- easy setting of e.g. driving speed and acceleration
- compact construction
 - perfect in confined areas
- easy service
 - easy access to batteries
- low overall height – optimum view
- long operation time per charge
- possibility to operate with the handle upright



Adjustable carriage is standard.



Hour counter, battery indicator and error finding in the same instrument.
Motor brake.



Available with optional extras, e.g. crane arm, drum turner, boom, remote control and level control.


Product (measured in mm)	SELF MINI		SELF MINI		SELFS MINI	
Capacity in kg	1000		1000		1000	
Lifting height with wrap-over forks	h_3	920	1650		890	
Fork length	l	1067, 1150		600/800/1067/1150/1520*		
Overall height	h_1	1320	1350		1320	
Overall width	b_1	635, 710			166+ b_4	
Fork span	b_5	Wrap-over: 350-560			Wrap-over: 350-800, chisel: 270-680, bar: 230-680	
Length without forks	l_2	620	630		620	
Overall length with 1150 forks	l_1	1825	1835		1825	
Overall height	h_4	1320	2025		1320	
Lowered height, forks	h_{13}	90 (fork span 560) 150 (fork span 350-555)			Wrap-over: 65, chisel: 45, bar: 65	
Load centre	c	l/2				
Width between legs	b_4					850-942, 942-1124, 1124-1306, 1240-1422**
Fork width	e	163				
Run-in length	l_x	1100 with 1150 mm forks			1080 with 1150 mm forks	
Gangway (w/pallet: 1200 x 800)	A_{st}	2200 - tests show that 1700 mm are enough - depends on b_4				
Free lift	h_2		330		330	
Turning angle of the wheels	210°					
Motor	0,7 kW 24 V speed control electronically variable					
Driving speed with/without load	Below 500 mm lift: 5,2/5,5 km/h, over 500 mm lift: 3/4 km/h					
Pump motor	1,2 kW 24 V					
Lifting speed with/without load	0,07/0,12 m/s					
Lowering speed with/without load	0,12/0,07 m/s					
Weight in kg (without battery)	308	363		348	403	

* Reduced capacity 750 kg.

** Width between straddle legs of more than 1306 mm: Max. capacity 800 kg. Fork length of 1520 mm is not recommended.



For intensive use, we recommend SELF Maxi or SELFS Maxi.

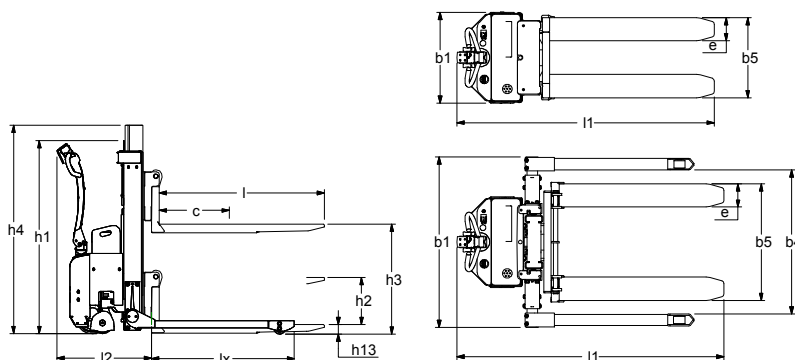

We also offer tailor-made solutions.

Please ask for further information or visit our website www.logitrans.com